




INSTRUCTIONS FOR ASSEMBLY OF THE TAP-N-GO™ SIGN


STEP 1 – PREPARE PANEL

NOTE: (If needed, have both sides screen printed or vinyl lettered before bending wings.)

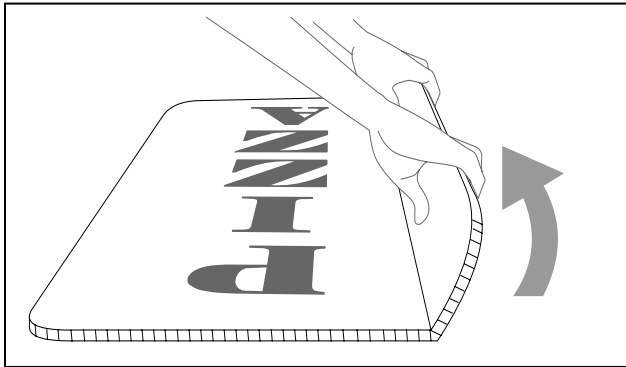

Panels will arrive flat. TOP CENTER is marked with a small removable decal. The two side wings need to be folded.

Place the panel on a flat table so that the flutes run left to right with the slits closest too you.. Firmly grasp the wing area, keeping your fingers away from the slits, and bend the wing up to about 45° Turn the panel over and repeat for 2nd wing.

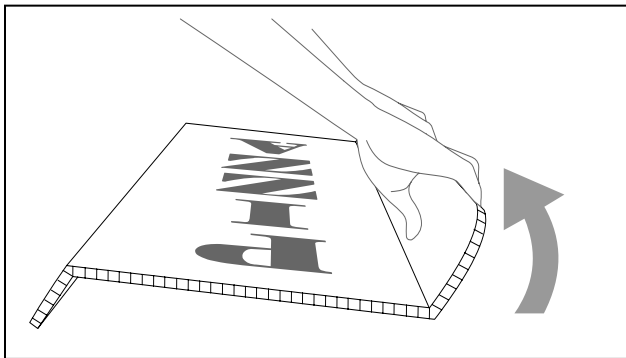

NOTE: From the end of the panel, the “wings” are bent in opposite directions.


STEP 2 – ASSEMBLE PANEL TO SHAFT The shaft will come pre-assembled with the bearings near the middle of the shaft and a restraining knob on one end.

Hold the shaft by the knob to allow all the hardware to settle around the middle of the shaft. Unscrew black ball knob from the shaft. While holding the shaft below the bearing hardware, slip shaft into center flute on the panel. Replace black knob. Panel should spin freely around rod.

STEP 3 – INSTALL SIGN

Tap-N-Go Sign can now be easily pressed into most soft - firm soil by grasping the panel on either side of the ball knob any applying a downward force. The shaft should be inserted 4-6” to provide stability. It may be necessary to pound the sign into very firm soil. The ball knob is made of a resilient but not indestructible plastic. Take precautions when using a any device to strike the ball knob.

NOTE: If soil is too firm for proper installation purchase “X-Base” free standing base for Tap-N-Go Signs.

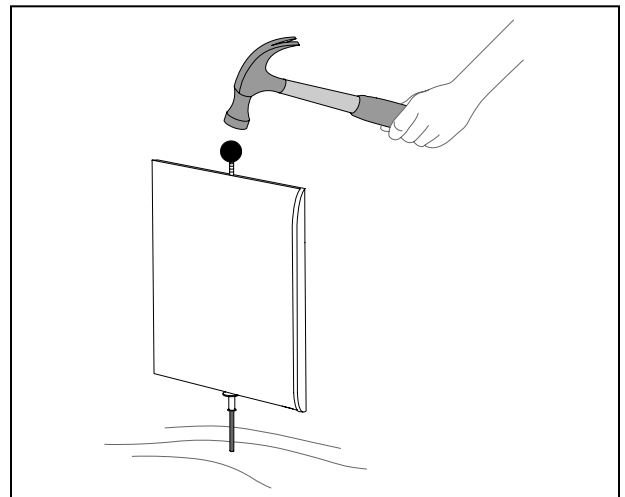

NOTE: Always wear protective eyewear to prevent possible injury from any flying debris. Always follow the instructions provided with any striking device such as a hammer.